

# Mechanics' Truck

# **DOMINATOR® DSC20**

## Technical Specifications

Commercial Vehicles



Specifications	9 ft	11 ft
Body Rating	20,000 ft-lb	20,000 ft-lb
Body Weight	1850 lb	2200 to 2300 lb (based on configuration)
Body Width (including rain eaves)	96"	96"
Sidepack Height	44"	44"
Sidepack Depth	22"	22"
Cargo Deck Width	50"	50"
Step Bumper Depth	14"	14"
Tailgate Height	10"	10"
Storage Capacity (including workbench)	97.2 cu ft	120.5 – 142.2 cu ft (based on configuration)
Angle of Departure	17° with crank-down outrigger 14° with drop-down outrigger	17° with crank-down outrigger 14° with drop-down outrigger
<b>Door Opening Dimensions – 44"H Sidepacks:</b>		
LH 1st Vertical	29.5"W x 38.5"H	29.5"W x 38.5"H
LH 2nd Vertical	N/A	16.5"W x 38.5"H
LH Horizontal	43"W x 21"H	44.5"W x 21"H
LH Rear	18"W x 38.5"H	18"W x 38.5"H
RH 1st Vertical	29.5"W x 38.5"H	29.5"W x 38.5"H
RH 2nd Vertical	N/A	16.5"W x 38.5"H
RH Horizontal	43"W x 21"H	44.5"W x 21"H
RH Rear	18"W x 38.5"H	18"W x 38.5"H



An Oshkosh Truck Corporation Company



## Standard Configurations

- 9 ft RH & LH standard sidepacks 44"
- 11 ft RH & LH standard sidepacks 44"
- 11 ft RF raised\* 60"
- 11 ft LF raised\* 60"
- 11 ft RF & LF raised\* 60"

\*Includes 1st & 2nd vertical.

## Body Materials

The sidepacks are constructed of 14-gauge galvanized steel. The floor structure is constructed of 12-gauge galvanized steel and 1/8" deckplate steel. The step bumper is constructed of galvanized and cold-rolled steel.

## Body Weight

9 ft RH & LH standard	1850 lb
11 ft RH & LH standard	2200 lb
11 ft RF raised	2250 lb
11 ft LF raised	2250 lb
11 ft RF & LF raised	2300 lb


## Body Sub-Structure

Patented inverted A-frame design constructed of 12-gauge galvanized material with integral crane box and rear outrigger housing.

## Electrical System

The electrical system consists of a central power distribution point in the crane box using automotive-style harnesses. The circuits use white wire with the circuit function printed every 3". The harness is protected by an overbraid that is heat- and cut-resistant.

### Sub-Structure

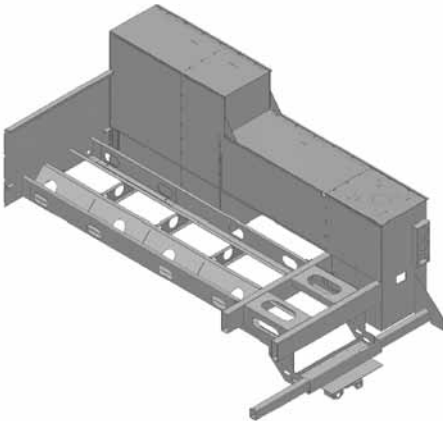

## Doors

The doors are constructed of 14-gauge galvanized steel with internal formed eaves and hemmed edges. The latches are a 3-point, locking rotary T-handle style. They are constructed of cast steel with a powdercoat finish. The hinges are stainless steel with composite washers.


## Storage Capacity

9 ft RH & LH standard	97.2 cu ft
11 ft RH & LH standard	120.5 cu ft
11 ft RF raised	131.3 cu ft
11 ft LF raised	131.3 cu ft
11 ft RF & LF raised	142.2 cu ft

## Options

- Drawers and drawer sets
- Standard adjustable shelves
- 3"H divided adjustable shelves
- Manual outriggers
- Vises and vise plates
- Individual incandescent compartment lights
- Work lights
- Air systems
- Telescopic cranes up to 20,000 ft-lb

### Angle of Departure

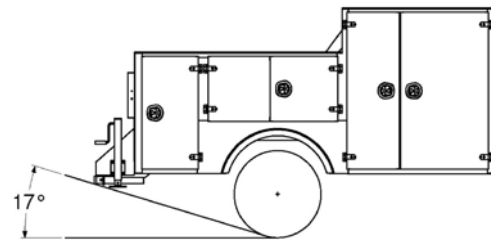

17° with manual crank-down outrigger  
14° with manual drop-down outrigger

## Iowa Mold Tooling Co., Inc.

500 Highway 18 West • P.O. Box 189 • Garner, Iowa 50438-0189  
800-247-5958 • 641-923-3711 • Fax: 641-923-6063 • www.imt.com

IMT reserves the right to make changes in engineering, design, and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation.

IMT, DOMINATOR, and the IMT LOGO are registered trademarks or trademarks of Iowa Mold Tooling Co., Inc., Garner, IA, USA.

© 2007 Iowa Mold Tooling Co., Inc. All Rights Reserved.