



F600A



evolution
CONCEPT

english


italiano

français

deutsch

español

nederlands

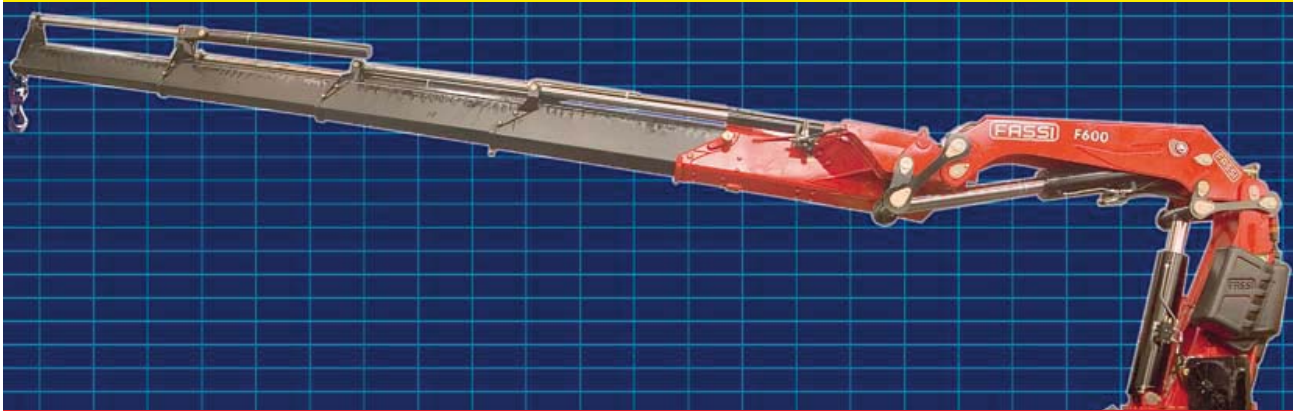

cranes without compromise


FASSI

CRANES WITHOUT COMPROMISE




FASSI


evolution
CONCEPT




F600A.22

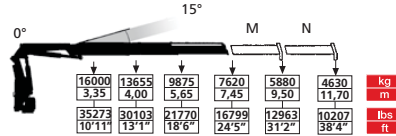


F600A.23

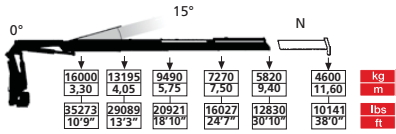


F600A.24

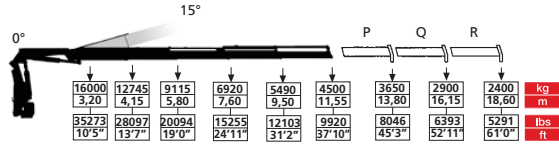


F600A.25

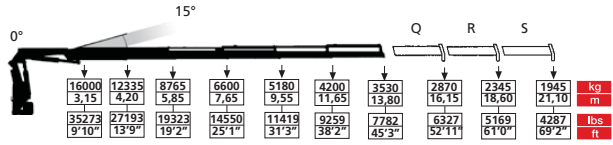


F600A.26

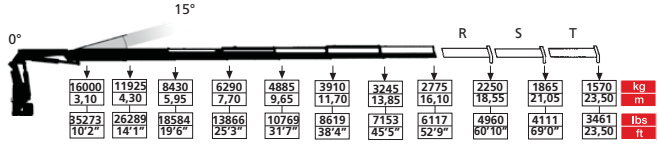

F600A.27

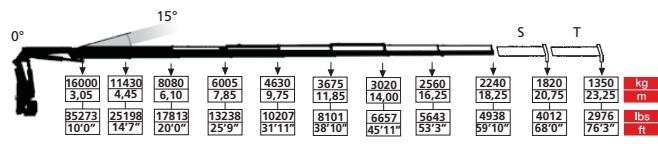


F600A.28

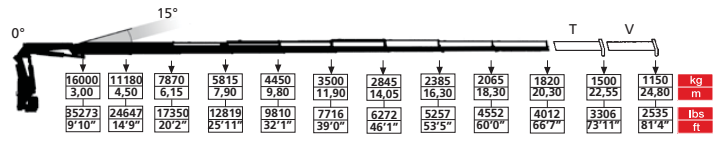


	T		m		°		kNm		Mpa		l/min		oil			
	tm	lbs.ft	m	ft			kNm	lbs.ft	Mpa	psi	l/min	gal/min	l	gal	kg	lbs
F600A.22	56,7	410111	7,45	24'5"	360	CONTINUOUS	45,0	33199	31,5	4570	70-80	18-21	250	66	5100	11243
F600A.23	54,7	395645	9,40	30'10"	360	CONTINUOUS	45,0	33199	31,5	4570	70-80	18-21	250	66	5435	11982
F600A.24	52,9	382626	11,55	7'10"	360	CONTINUOUS	45,0	33199	31,5	4570	70-80	18-21	250	66	5765	12709
F600A.25	51,8	374669	13,80	45'3"	360	CONTINUOUS	45,0	33199	31,5	4570	70-80	18-21	250	66	6075	13392
F600A.26	51,2	370330	16,10	52'9"	360	CONTINUOUS	45,0	33199	31,5	4570	70-80	18-21	250	66	6365	14032
F600A.27	50,8	367436	18,25	59'10"	360	CONTINUOUS	45,0	33199	31,5	4570	70-80	18-21	250	66	6575	14495
F600A.28	50,3	363820	20,30	66'7"	360	CONTINUOUS	45,0	33199	31,5	4570	70-80	18-21	250	66	6755	14892

FASSI


F600A.25 L516

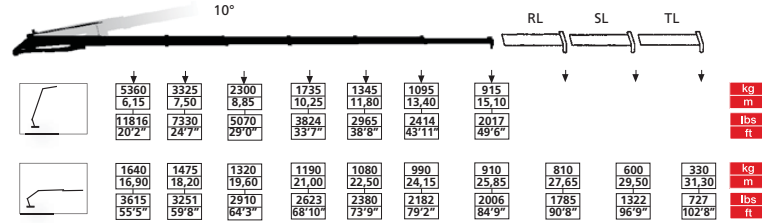


F600A.26 L426

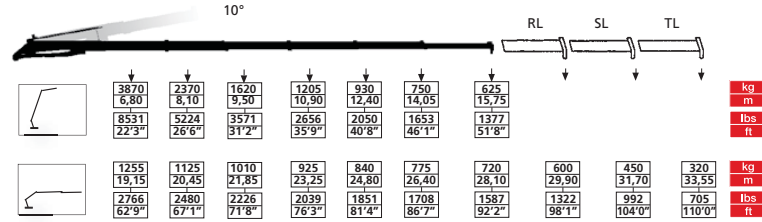


F600A.27 L426

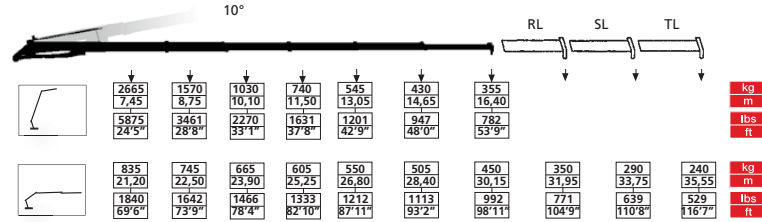

F600A.27 L214


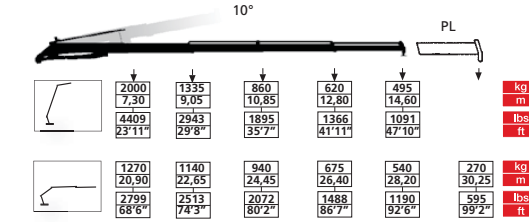


F600A.28 L214


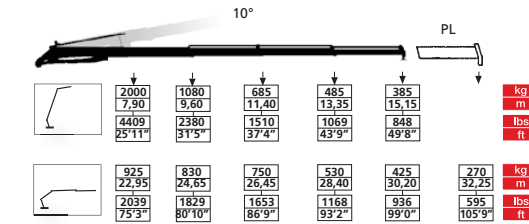


	tm lbs.ft	m ft	°	kNm lbs.ft	Mpa psi	l/min gal/min	l gal	kg lbs	
F600A.25 L516	51,8 374669	25,85 84'9"	360 CONTINUOUS	45,0 33199	31,5 4570	70-80 18-21	250 66	7580 16710	
F600A.26 L426	51,2 370330	28,10 92'2"	360 CONTINUOUS	45,0 33199	31,5 4570	70-80 18-21	250 66	7685 16942	
F600A.27 L426	50,8 367436	30,15 98'11"	360 CONTINUOUS	45,0 33199	31,5 4570	70-80 18-21	250 66	7910 17438	
F600A.27 L214	50,8 367436	28,20 92'6"	360 CONTINUOUS	45,0 33199	31,5 4570	70-80 18-21	250 66	7360 16225	
F600A.28 L214	50,3 363820	30,20 99'0"	360 CONTINUOUS	45,0 33199	31,5 4570	70-80 18-21	250 66	7555 16655	

F600A

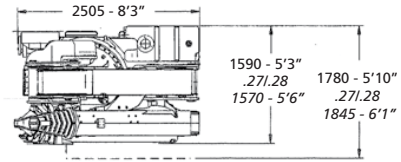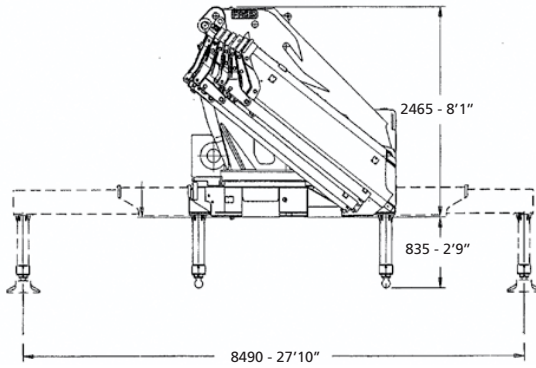

L SERIE

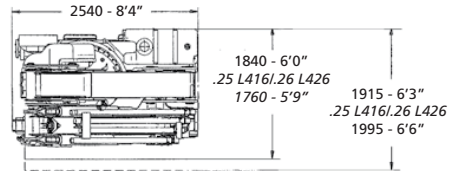

L214	650 kg / 1432 lbs	L426	1200 kg / 2645 lbs	L516	1400 kg / 3086 lbs
PL	21 kg / 46 lbs	RL	36 kg / 79 lbs	RL	36 kg / 79 lbs
		SL	25 kg / 55 lbs	SL	25 kg / 55 lbs
		TL	15 kg / 33 lbs	TL	15 kg / 33 lbs



CPZ 04/2007

Dati e dimensioni sono forniti a titolo indicativo e non impegnativo - Toutes les données et descriptions sont fournies à titre indicatif, sans engagement - Unverbindliche Angaben, Konstruktionsänderungen vorbehalten
Data and descriptions are approximate and not binding - Datos y descripciones todos a título indicativo y no imperativo - Specificaties zijn niet bindend, wijzigingen derhalve voorbehouden



FASSI GRU S.p.A. - Via Roma, 110 - 24021 Albino (Bergamo) ITALY
Tel: +39 035 776400 - Fax +39 035 755020
<http://www.fassigroup.com> E-mail: fassigroup.com

